

WHEELER INDUSTRIAL CO.,LTD

TEL +886 4 23591201
FAX +886 4 23591562

WWW.WHEELERWORLDWIDE.COM
INFO@WHEELER.COM.TW



@Wheeler Worldwide International



WHEELER
WORLDWIDE

2018

2018

WHEELER®
WORLDWIDE

THE POWER OF MOVEMENT







INDEX

E-BIKES SERIES

MOUNTAINBIKES

GRAVEL / URBAN

CITY

RACE

EMTB

ECITY/ETREKKING

BRAZILIAN

FALCON

EAGLE

PROTRON

PASSERA

ALLEY

ECORIDER

ROUTE

GEOMETRIES

005

012

015

021

027

035

045

053

057

065

071

THE POWER OF MOVEMENT

THE POWER OF MOVEMENT: For WHEELER, this slogan is not only a catchy one, it reflects the feelings and the pleasure you experience when riding a bike. For more than 40 years, WHEELER has been producing bikes suitable for high performance sporting, for everyday life and for leisure. Our large range offers bikes that will suit all types of requirements and desires.

This is evidenced by World Championship, European and Swiss Championship titles, but also by a strong brand presence in various markets. Year after year, WHEELER's engineers and product managers can learn from experiences in the competition environments. This is how they are able to always offer bikes that are up-to-date. Only cutting edge materials and technologies are used, such as the new carbon frame from the Falcon series and the Shimano XT Di2 electronic gearset.

To offer bikers the best bike, their choice would be parts from well-known manufacturers. This high level of quality is then distributed only through a network of qualified WHEELER dealers and made available to the team's racers. They also expect the same level of quality.

Feel and experience why we are so different! We encourage you to do it.

THE POWER OF MOVEMENT.





E-BIKES ***SERIES***





The i-Riser LTD is WHEELER's new top-of-the-line e-mountainbike. Its aluminium frame has been skilfully designed around Yamaha's powerful yet compact mid-motor. The battery with a capacity of 500Wh has also been integrated neatly into the main frame's design. Both the 34 fork and the shock are from Fox's Float Performance series, keeping 140mm of travel in check. Thanks to the combination of a Shimano drivetrain and an FSA crank with a double chainring set-up, the bike offers 22 gears and a really wide bandwidth. Just like the drivetrain WHEELER has sourced the hydraulic disc brakes from Shimano's XT groupset. Oversized rotors further add to the power of these stoppers while 2.8 inch-wide Schwalbe tires deliver plenty of traction. Last but not least the height of the Ergon saddle can be adjusted from the handlebar thanks to Kind Shock's LEV dropper post.

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 TUBES SUSPENSION FRAME 4 BAR LINKAGE DESIGN, YAMAHA CENTER PW-X MOTOR MOUNT DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	FOX 34 FLOAT 29ER, PERFORMANCE, BOOST, 140MM 1.5T, AIR SPRING, FIT 4 HYDRAULIC DAMPING, 3 POS MICRO ADJ LEVER, 51MM RAKE, 15QRx110MM BOOST, 140MM TRAVEL
CENTER MOTOR	YAMAHA PW-X CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO DEORE XT, 22 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, F: 203MM/ R: 180MM ROTORS
WEIGHT	19.7 KG

> I-RISER SE / I-RISER HD

PAGE – 7



I-RISER SE

SPEED	11 SPEED
FRAME	27.5" ALLOY 6061 TUBES SUSPENSION FRAME 4 BAR LINKAGE DESIGN, YAMAHA CENTER PW-X MOTOR MOUNT DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	FOX 34 FLOAT 29ER, PERFORMANCE, BOOST, 140MM 1.5T, AIR SPRING, FIT 4 HYDRAULIC DAMPING, 3 POS MICRO ADJ LEVER, 51MM RAKE, 15QRx110MM BOOST, 140MM TRAVEL
CENTER MOTOR	YAMAHA PW-X CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO SLX, 11 SPEED
BRAKE	SHIMANO, BR-M615, F: 203MM / R: 180MM ROTORS
WEIGHT	19.5 KG



I-RISER HD

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 TUBES SUSPENSION FRAME 4 BAR LINKAGE DESIGN, YAMAHA CENTER PW-X MOTOR MOUNT DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 27.5 PLUS 1.5 TAPER HEXLOCK SL 15, 140MM 27.5+, 140MMx1 1/8" MAGNESIUM SUSPENSION FORK WITH DORADO AIR SPRING, ABS+ HYDRAULIC DAMPING, TPC REBOUND, 140MM TRAVEL W/ HEXLOCK SL 15x110MM
CENTER MOTOR	YAMAHA PW-X CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO SLX, 22 SPEED
BRAKE	SHIMANO, BR-M447, F: 203MM / R: 180MM ROTORS
WEIGHT	19.6 KG

I-RIDER SE / I-RIDER HD



I-RIDER SE



I-RIDER HD

PAGE — 8

SPEED	22 SPEED
FRAME	27.5" FRAME 6061 ALLOY P/G TUBES, YAMAHA PW-X MOTOR MOUNT DESIGN, WITH DIRECT MOUNT HANGER DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	FOX 34 FLOAT 29", PERFORMANCE, BOOST, 120MM, FIT 4 HYDRAULIC DAMPING, 3 POS ADJ LEVER, M15x110MM BOOST, 120MM TRAVEL
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA LIMN 37V / 10.8 AH/ 500WH DOWN TUBE TYPE, EURO STANDARD
GEAR	SHIMANO DEORE SLX, 22 SPEED
BRAKE	SHIMANO DEORE BR-M615, F: 203MM/ R: 180MM ROTORS
WEIGHT	18.3 KG

SPEED	20 SPEED
FRAME	27.5" FRAME 6061 ALLOY P/G TUBES, YAMAHA PW-X MOTOR MOUNT DESIGN, WITH DIRECT MOUNT HANGER DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 27.5 PLUS 1.5 TAPER HEXLOCK SL 15, 120MM 27.5+, 120MM x 1 1/8" MAGNESIUM SUSPENSION FORK WITH TS AIR SPRING, HYDRAULIC DAMPING, 120MM TRAVEL W/ HEXLOCK SL 15x110MM
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA LIMN 37V / 10.8 AH/ 500WH DOWN TUBE TYPE, EURO STANDARD
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-M395, F: 203MM/ R: 180MM ROTORS
WEIGHT	18.0 KG



With its fast-rolling Continental tires and a Manitou Markhor suspension fork with 100mm of travel, the i-Rider is equally at home on paved roads as in modest terrain. Using hydroformed aluminium tubes, WHEELER has designed the bike’s characteristic frame around Yamaha’s powerful PW mid-motor. Since the battery mounted to the down tube has a capacity of 500Wh the range is generous with about 125 kilometers. The selection of gears is big as well thanks to the combination of a Shimano drivetrain and an FSA crank with a double chainring set-up. You also get strong all-weather braking and fine modulation thanks to Shimano’s hydraulic disc brakes. As for the contact points between the bike and the rider WHEELER has opted for Selle Royal’s Rampage saddle and a selection of parts from Levelnine.

SPEED	20 SPEED
FRAME	27.5" FRAME 6061 ALLOY P/G TUBES, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	15",17",19",21"
FORK	MANITOU MARKHOR 27.5 1.5 TAPER TRAVEL 100MM, 9MM, KWICK TOGGLE DAMPER, NO REMOTE LOCKOUT
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA LIMN 37V / 10.8 AH/ 500WH DOWN TUBE TYPE, EURO STANDARD
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R: 180MM ROTORS
WEIGHT	17.8 KG



The i-Leen SE is an e-mountainbike for concerning women. Thanks to the kinked top tube its aluminium frame offers an extra bit of standover clearance. WHEELER has neatly integrated both Yamaha's powerful PW-X mid-motor and the battery with a generous capacity of 500Wh into the frame's design. Boost axles add to the stiffness of the chassis and create the space needed for the 2.6 inch-wide plus tires. For additional comfort and control on unpaved routes the bike comes with a Fox 34 Float Performance fork that has 120mm of travel. As for the drivetrain, the mix of parts from Shimano's XT and SLX groupsets and a crank from FSA results in 22 gears. Of course the i-Leen SE comes with hydraulic discbrakes from Shimano as well. And since we're talking about a women-specific bike, you also get a saddle, Ergon grips and a handlebar that fit the female anatomy well.

SPEED	22 SPEED
FRAME	27.5" FRAME 6061 ALLOY P/G TUBES, YAMAHA PW-X MOTOR MOUNT DESIGN, WITH DIRECT MOUNT HANGER DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	FOX 34 FLOAT 29", PERFORMANCE, BOOST, 120MM, FIT 4 HYDRAULIC DAMPING ,3 POS ADJ LEVER, M15x110MM BOOST, 120MM TRAVEL
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA LIMN 37V / 10.8 AH/ 500WH DOWN TUBE TYPE, EURO STANDARD
GEAR	SHIMANO DEORE SLX, 22 SPEED
BRAKE	SHIMANO DEORE, BR-M615 F: 203MM/ R: 180MM ROTORS
WEIGHT	17.6 KG

> I-LEEN HD



PAGE – 11

The i-Leen HD is WHEELER's second e-mountainbike for women ready for rough terrain rolling on 2.6 inch-wide Schwalbe tires. Boost axles add to the aluminium frame's stiffness and its kinked top tube offers some additional standover clearance. A lot of effort has gone into neatly integrating Yamaha's powerful PW-X mid-motor and the battery with a large capacity of 500Wh into the bike's overall design. Add to that the 20 gears and a wide range that you get thanks to the combination of FSA's crank with parts from Shimano's XT and Deore groupsets. Hydraulic disc brakes deliver safe and modulated braking power in all weather conditions. And since ergonomics matter, you also get Selle Royal's women-specific Sirio Lady saddle and a handlebar and grips that suit the female anatomy.

SPEED	20 SPEED
FRAME	27.5" FRAME 6061 ALLOY P/G TUBES, YAMAHA PW-X MOTOR MOUNT DESIGN, WITH DIRECT MOUNT HANGER DESIGN, 12MM THRU AXLE OLD 148MM.
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 27.5 PLUS 1.5 TAPER HEXLOCK SL 15, 120MM 27.5+, 120MM x 1 1/8" MAGNESIUM SUSPENSION FORK WITH TS AIR SPRING, HYDRAULIC DAMPING, 120MM TRAVEL W/ HEXLOCK SL 15x110MM
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIMUM TORQUE 80NM, W/ ISIS AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA LIMN 37V / 10.8 AH/ 500WH DOWN TUBE TYPE, EURO STANDARD
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-M395, F: 203MM/ R: 180MM ROTORS
WEIGHT	17.3 KG

I-VISION DI IH / I-VISION DI C



I-VISION DI IH



I-VISION DI C

PAGE — 12

SPEED	INTER 8 SPEED
FRAME	LADY FRAME ALLOY 6061 P/G NEW HYDROFOAM DEEP INSTEP ONE DOWN TUBE, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	44,48,52CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 13.5 AH / 500WH WITH BATTERY MOUNT BRACKET CARRIER SHORTEN TYPE AND CHARGER EURO TYPE
GEAR	SHIMANO ALFINE, INNER 8 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	22.5 KG

SPEED	10 SPEED
FRAME	LADY FRAME ALLOY 6061 P/G NEW HYDROFOAM DEEP INSTEP ONE DOWN TUBE, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	44,48,52CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 13.5 AH / 500WH WITH BATTERY MOUNT BRACKET CARRIER SHORTEN TYPE AND CHARGER EURO TYPE
GEAR	SHIMANO DEORE, 10 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	21.6 KG

> I-VISION MAN IH / I-VISION MAN C



I-VISION MAN IH



I-VISION MAN C

PAGE – 13

SPEED	INTER 8 SPEED
FRAME	700C ALLOY 6061 P/G NEW HYDROFOAM TUBES, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	48,52,56,60CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO TANDARD.
GEAR	SHIMANO ALFINE, INNER 8 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	23.0 KG

SPEED	10 SPEED
FRAME	700C ALLOY 6061 P/G NEW HYDROFOAM TUBES, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	48,52,56,60CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO DEORE, 10 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	22.0 KG

I-VISION HYBRID PW-X / I-VISION HYBRID PW



I-VISION HYBRID PW-X



I-VISION HYBRID PW

PAGE — 14

SPEED	10 SPEED
FRAME	ALLOY 6061 P/G TUBES, D/T YAMAHA BATTERY DESIGN, YAMAHA PW-X CENTER MOTOR MOUNT DESIGN
FRAME SIZE	44,48,52,56CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM,W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO DEORE, 10 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	21.6 KG

SPEED	10 SPEED
FRAME	ALLOY 6061 P/G TUBES, D/T YAMAHA BATTERY DESIGN, YAMAHA PW CENTER MOTOR MOUNT DESIGN
FRAME SIZE	44,48,52,56CM
FORK	ROCK SHOX FS-PARAGON GOLD RL-A1 TAPER
CENTER MOTOR	YAMAHA CENTER MOTOR DRIVE UNIT 36V, MAXIUM TORQUE 80NM, W/ SQUARE AXLE.
RANGE	MAX. 125KM
BATTERY	YAMAHA BATTERY LIMN 37V / 10.8 AH / 500WH DOWN TUBE TYPE, EURO STANDARD.
GEAR	SHIMANO DEORE, 10 SPEED
BRAKE	SHIMANO BR-M395, F: 180MM/ R:180MM ROTORS
WEIGHT	21.6 KG



BRAZILIAN **SERIES**

BRAZILIAN

> All-mountain and enduro Twentyniners with sumptuous travel are the new trend. And the new Brazilian carbon frame with the tapered head tube provides a clean look, all the while extending the internal cable routing benefits to the boost rear axle. The geometry with a low bottom bracket and flat steering angle also play a role in the benefits. Since the seat stays are now produced as a single piece, the rear has become much stiffer. WHEELER has kept the chainstays short at 438 mm - safe for a Twentyniner with generous 150 mm travel to maintain agile handling. To fully benefit from this travel and to maximize traction, the TNT kinematics is slightly more progressive. You have a choice with the wheels: The rear of the Brazilian can be specified with 29 inch wheels with tires up to 2.6 inches wide or 27.5 inch wheels with Plus tires. Upon a closer look will show many decisions WHEELER has made in the Brazilian frame renewal: Vario seatpost with internal cable routing designed for single drive without derailleur

> Brazilian SE

CARBON

29" TNT

160mm

ROD SEAT POST

BOOST STANDARD

ISCG 05 MOUNT



PAGE – 17

The Brazilian SE is a mountain bike like no other: The progressive TNT kinematics of the new carbon frame provides 150 mm travel at the rear, while the Lyrik RC Fork from Rock Shox provides 160 mm. That together with the high quality Spline Two M1700-wheels from DT Swiss in 29 inches will persevere rough terrain. The Brazilian SE can also efficiently handle extensive riding as a full-fledged enduro and all-mountain bike. Beyond those specifications, WHEELER makes no compromises on the trails and gives the Brazilian SE a single drivetrain with eleven gears and finely mutable disc brakes from the Shimano XT group. For even more confidence in tricky passages, the height of the Selle Italia XR saddle mounted to the LEV Vario from Kind Shock can be adjusted easily from the handlebar.

SPEED	11 SPEED
FRAME	29ER UD CARBON MONOCOQUE, TRAVEL 150MM, 12x148MM BOOST THRU AXLE
FRAME SIZE	17", 19", 21"
FORK	ROCK SHOX, BOOST 15x110 MXL STEALTH SOLO AIR 160 GLOSS BLACK TAPERED CROWN, ADJUST COMPRESSION DAMPER
REAR SHOCK	ROCK SHOX, RS-SOLX-RTR-A1, RS DELUXE RL REMOTE IN PULL 185x55 DEBONAIR 2 TOKENS MM TUNE 430LB LOCKOUT TUNNION BEARING
GEAR	SHIMANO XT, 11 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000 DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	13.5 KG

Brazilian SE +



CARBON

27.5" PLUS

160 mm

ROP SEAT POST

BOOST STANDARD

ISCG 05 MOUNT

PAGE — 18

The Brazilian SE+ is equipped with 2.8 inch-wide Plus tires from Schwalbe to advance through crippling surfaces. The progressive 150 mm travel action of the TNT rear triangle in conjunction with the performance of the 160 mm Lyrik RC Fork from Rock Shox results in huge potential reserves in the field. The high quality Spline Two M1700-wheels from DT Swiss in 27.5 inches are coupled with the 1 by 11 gear and then stopped by the powerful hydraulic disc brakes from the Shimano's XT group from Shimano. All of that are attached to various Level9 parts. What is a must for an all-mountain and enduro racer is the LEV Vario seatpost from Kind Shock. And lastly, of course, is the carbon frame. Modern design standards bestow the frames with a clean look thanks to internal cable routings.

SPEED	11 SPEED
FRAME	29ER UD CARBON MONOCOQUE, TRAVEL 150MM, 12x148MM BOOST THRU AXLE
FRAME SIZE	17", 19", 21"
FORK	ROCK SHOX, BOOST 15x110 MXL STEALTH SOLO AIR 160 GLOSS BLACK TAPERED CROWN, ADJUST COMPRESSION DAMPER
REAR SHOCK	ROCK SHOX, RS-SOLX-RTR-A1, RS DELUXE RL REMOTE IN PULL 185x55 DEBONAIR 2 TOKENS MM TUNE 430LB LOCKOUT TUNNION BEARING
GEAR	SHIMANO XT, 11 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000 DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	13.5 KG

> Brazilian HD

CARBON

29"
TNT

160
mm

ROP
SEAT
POST

BOOST
STANDARD

ISCG '05
MOUNT



PAGE – 19

With the Brazilian HD, WHEELER presents a Twentyniner-Fully with a completely renewed carbon frame. This includes a conical head tube as well as boost axle in light of modern standards. At the rear, the progressive TNT kinematics ensures 150 mm of good usable travel. In the front, the 160 mm Yari RC forks from Rock Shox optimally prepares the Brazilian HD for splinted paths. Furthermore, it traverses very efficiently thanks to the 29 inch wheels and is so very perfect for enduro and all-mountain adventures. The component set of this WHEELER is the Shimano XT group with the eleven-gear cassette and their proven disc brakes. Thanks to the LEV Vario from Kind Shock, the height of the X3 XP saddle from Selle Italia can be adjusted from the Level9 handlebars.

SPEED	11 SPEED
FRAME	29ER UD CARBON MONOCOQUE, TRAVEL 150MM, 12x148MM BOOST THRU AXLE
FRAME SIZE	17", 19", 21"
FORK	ROCK SHOX, BOOST 15x110 MXL STEALTH SOLO AIR 160 GLOSS BLACK TAPERED CROWN, ADJUST COMPRESSION DAMPER
REAR SHOCK	FOX, PERFORMANCE ELITE FLOAT DPS EVOL LV REMOTE 2 POS NEW REMOTE LEVER SINGLE
GEAR	SHIMANO DEORE XT/ SLX, 11 SPEED
BRAKE	SHIMANO BR-MT500 DISC BRAKE, F:180MM/ R: 180MM ROTORS
WEIGHT	13.9 KG

Brazilian HD +



CARBON

27.5" PLUS

160 mm

**J ROP
SEAT
POST**

**BOOST
STANDARD**

**ISCG '05
MOUNT**

PAGE – 20

All suspension and Plus tires: These are the ingredients for fun and confidence in obstructive passages. The WHEELER Brazilian HD+ provides just that. Its carbon frame consists of the tapered head tube and the boost axle all the while being compatible with the latest build standards. Furthermore the 150 mm suspension travel makes good use of the TNT kinematics. The Brazilian HD+ is also specified with 160 mm-travel Yari RC Fork from Rock Shox and 2.8 inches-wide tires from Schwalbe mounted on 27.5 inch wheels. Again, the Shimano XT group set is used, comprising of the powerful disc brakes and the 1 by 11 drivetrain. A true-enduro and all-mountain racer must also not lack a Vario seatpost. The LEV Si from Kind Shock allows for lightning-fast adjustment of the seat height through the handlebar.

SPEED	11 SPEED
FRAME	29ER UD CARBON MONOCOQUE, TRAVEL 150MM, 12x148MM BOOST THRU AXLE
FRAME SIZE	17", 19", 21"
FORK	ROCK SHOX, BOOST 15x110 MXL STEALTH SOLO AIR 160 GLOSS BLACK TAPERED CROWN, ADJUST COMPRESSION DAMPER
REAR SHOCK	FOX, PERFORMANCE ELITE FLOAT DPS EVOL LV REMOTE 2 POS NEW REMOTE LEVER SINGLE
GEAR	SHIMANO XT/ SLX, 11 SPEED
BRAKE	SHIMANO BR-MT500 DISC BRAKE, F:180MM/ R: 180MM ROTORS
WEIGHT	13.9 KG

FALCON **SERIES**





FALCON

> Whether you are crosscountry racing, marathon racing or on a demanding ride through the backcountry: a Full suspension Twentyniner will combine efficiency and sumptuous traction with plenty of cushion for rough sections. WHEELER Falcon models offer a firm TNT four-joint kinematics, which stays taut during pedaling and combines light weight with the stiff frames, whether carbon fiber or aluminum. You will find tapered head tube, press-fit bottom bracket and 148 mm-wide boost rear axle on the newly developed frame, which adheres to the most modern standards, all contributing to the stiffness. Additionally, WHEELER chooses to run cables internally for a clean look yet provides flexibility with guides for many other options. Thus, clean single, dual and electronic drive installations are possible along with a Vario seatpost. While racers ride Falcon models with 100 mm-travel fully fitted with racing accoutrements, sport tourers benefit from models with 120 mm travel; Vario seatpost are equipped on lower-end models.

> Falcon RC Team

CARBON

29" TNT

100mm

XTR Di2
DIGITAL INTEGRATED INTELLIGENCE

BOOST STANDARD




PAGE – 23

The “Falcon Team” name says it all. Race ready parts are installed on this model as per WHEELER Pro Team’s specifications. We combine our carbon fiber frame with an efficient four-joint kinematics providing 100mm of travel as a basis. Then comes the addition of the OPM O.D.L. Race fork and the particularly springy X414 O.D.L. rear shock from DT Swiss. The WHEELER Falcon Team relies on the electronic XTR Di2 from Shimano for smooth gear shiftings. With only one chainring and a wide-ranged cassette, this offers quick gear changes and the best gear ratios for every situation. Furthermore, the connecting cable lines and circuits are stowed internally in the frame. For safe decelerations on longer runs, the factory has equipped XTR disc brake with IceTech Freeza rotors. The superior Spline One XR1501 wheels from DT Swiss are easy to convert to Tubeless, and the magnificent parts from Ritchey and Selle Italia decreases the weight of the Falcon Team even further.

SPEED	11 SPEED
FRAME	29ER UD CARBON MONOCOQUE SUSPENSION FRAME 4 BAR LINKAGE TYPE, WITH 12MM THRU AXLE 148MM, TRAVEL 100MM
FRAME SIZE	15", 17", 19", 21"
FORK	DT SWISS OPM RACE 100 O.D.L REMOTE 15/100MM 29ER, TRAVEL 100MM, W/ 15MM RWS
REAR SHOCK	DT SWISS R414 O.D.L MM SAB REMOTE READY R2
GEAR	SHIMANO DEORE XTR Di2, 11 SPEED
BRAKE	SHIMANO DEORE XTR, BR-M9000, F: 160MM/ R :160MM ROTORS
WEIGHT	9.7 KG

Falcon LTD / Falcon SE



CARBON

29" TNT

100mm

XT Di2
DIGITAL INTEGRATED INTELLIGENCE

BOOST STANDARD



FALCON LTD

CARBON

29" TNT

120mm

J ROP SEAT POST

XT Di2
DIGITAL INTEGRATED INTELLIGENCE

BOOST STANDARD



FALCON SE

SPEED	22 SPEED
FRAME	29ER UD CARBON MONOCOQUE, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, WITH 12MM THRU AXLE 148MM, TRAVEL 100MM
FRAME SIZE	15", 17", 19", 21"
FORK	FOX PERFORMANCE ELITE 32 FLOAT SC 100MM, TRAVEL: 100MM, 15x10MM, WITH CTD REMOTE LEVER
REAR SHOCK	FOX PERFORMANCE ELITE FLOAT DPS EVOL SV REMOTE
GEAR	SHIMANO XT Di2, 22 SPEED
BRAKE	SHIMANO XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	11.1 KGS

SPEED	22 Speed
FRAME	29ER UD CARBON MONOCOQUE SUSPENSION FRAME 4 BAR LINKAGE TYPE, WITH 12MM THRU AXLE 148MM, TRAVEL 120MM
FRAME SIZE	15", 17", 19", 21"
FORK	FOX, FACTORY 34 FLOAT 29ER 120, OPEN MODE ADJ, TRAVEL: 120MM, 15x10MM, WITH CTD REMOTE LEVER
REAR SHOCK	FOX FACTORY FLOAT 3 POS SV EVOL REMOTE-READY KASHIMA
GEAR	SHIMANO XT Di2, 22 SPEED
BRAKE	SHIMANO XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	12.1 KGS

> Falcon 12 / Falcon 22

CARBON

29" ^{TNT}

120^{mm}

**J ROP
SEAT
POST**

**BOOST
STANDARD**



FALCON 12

PAGE — 25

CARBON

29" ^{TNT}

120^{mm}

**J ROP
SEAT
POST**

**BOOST
STANDARD**




FALCON 22

SPEED	12 SPEED
FRAME	29ER UD CARBON MONOCOQUE SUSPENSION FRAME 4 BAR LINKAGE TYPE, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, WITH 12MM THRU AXLE 148MM
FRAME SIZE	15", 17", 19", 21"
FORK	FOX PERFORMANCE 34 FLOAT 29ER 120, 2 POS, 51MM 15QR, TRAVEL: 120MM
REAR SHOCK	FOX PERFORMANCE ELITE FLOAT 2 POS SV EVOL REMOTE-READY
GEAR	SRAM GX EAGLE, 12 SPEED
BRAKE	SRAM LEVEL TL, DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	12.6 KG

SPEED	22 SPEED
FRAME	29ER UD CARBON MONOCOQUE SUSPENSION FRAME 4 BAR LINKAGE TYPE, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, WITH 12MM THRU AXLE 148MM
FRAME SIZE	15", 17", 19", 21"
FORK	FOX RHYTHM 34 FLOAT 29ER 120 SWEEP ADJ 51MM 15QR, TRAVEL: 120MM
REAR SHOCK	FOX PERFORMANCE FLOAT 3 POS SV EVOL
GEAR	SHIMANO DEORE XT, 22 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	13.4 KG

Falcon 32 / Falcon 42



29" TNT

120 mm

J ROP
SEAT
POST

BOOST
STANDARD



FALCON 32

29" TNT

120 mm

J ROP
SEAT
POST



FALCON 42

PAGE — 26

SPEED	22 SPEED
FRAME	29ER ALLOY 6061 S.L. TUBES SUSPENSION FRAME 4 BAR LINKAGE TYPE, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, O.L.D. 148MM
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 29 120MM TAPER
REAR SHOCK	MANITOU MCLEOD STANDARD AIR CAN
GEAR	SHIMANO XT/ SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM / R: 180MM ROTORS
WEIGHT	13.9 KG

SPEED	20 SPEED
FRAME	29ER ALLOY 6061 S.L. TUBES SUSPENSION FRAME 4 BAR LINKAGE TYPE, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, O.L.D. 148MM
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MARKHOR 29, TS AIR SPRING, TRAVEL 120MM
REAR SHOCK	MANITOU RADIUM EXPERT, AIR/ OIL TS AIR SPRING
GEAR	SHIMANO SLX/ DEORE, 20 SPEED
BRAKE	SHIMANO BR-M315, DISC BRAKE, F: 180MM / R: 180MM ROTORS
WEIGHT	14.2 KG





EAGLE SERIES

EAGLE

> Efficiency is needed when the start-up shot is heard during a race. Each stride has to reach the rear axle, every steering impulse must be reliably and precisely translated into directional changes, and every gram can be a decisive disadvantage in the battle for victory and top positions. This is also evident in the Eagle models of WHEELER: The torsionally-stiff carbon frame of the Eagle Team weighs just 950 grams, despite the fact that the drivetrain lines are laid inside and the 12 mm x 142 mm axle at the back - and is almost organic in transitional ride flows. For a little more comfort, the 27.2 mm diameter seat post provides a lustrous feel. The Aluminum versions, which are now available as 27.5 inch and 29 inch versions, of the Eagle offer a clean look thanks to internal cables and lines. In addition to this, suspension forks with 100 mm travel and fast-rolling, light 29-inch, or 27.5 inch wheels are furnished as the only remaining necessary equipment. The WHEELER team riders know: "Less is more", and only the best is good enough in the race.

> Eagle Team

CARBON

29" TNT

100mm

XTR Di2
DIGITAL INTEGRATED INTELLIGENCE



PAGE – 29

The Eagle Team is a Twentyniner-Hardtail of the highest pedigree, whose equipment equates to those of the athletes from the WHEELER Pro team. This begins with the frame, which is made of high-quality carbon fiber from monocoque construction. From the tapered control tube to the 12 mm x 142 mm snap-in axle at the rear, this frame offers the latest installation standards - and thanks to the internal cables, the frame is tidy. Matching to the light frame is a OPM O.D.L. Race fork installed from DT Swiss. This is very light, offers 100 mm of travel and can be locked from the handlebar. WHEELER does not have a front derailleur on the Eagle Team, and the eleven gears of the XTR Di2 drive are electronically controlled. Thanks to the IceTech Freeza rotors, Shimano's hydraulic disc brakes are also equipped for longer runs. DT Swiss contributes with the Spline One XR1501 wheels, which are extremely lightweight and can easily be retrofitted to tubeless.

SPEED	11 SPEED
FRAME	29ER FRAME MONOCOQUE CARBON UD FINISH, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED DESIGN HEAD TUBE, 12MM THRU AXLE O.L.D. 142MM
FRAME SIZE	15", 17", 19", 21"
FORK	DT SWISS OPM RACE 100 O.D.L CARBON TAPER REMOTE 15MM 29ER, TRAVEL 100MM,W/ 15MM RWS
GEAR	SHIMANO DEORE XTR Di2, 11 SPEED
BRAKE	SHIMANO DEORE XTR, BR-M9000, F: 160MM/ R :160 MM ROTORS
WEIGHT	8.7 KG

Eagle LTD



CARBON

29" INT

100^{mm}

XT Di2
DIGITAL INTEGRATED INTELLIGENCE

PAGE – 30

With the Eagle LTD, WHEELER offers a more favorable price variant of the race team portfolio, which is nevertheless technically cutting edge. This begins with the light-weight carbon frame and internal cable lines running within the it, as well as modern design standards: from the conical steering tube to the pressfit inner bearing to the 12 mm x 142 mm rear axle. With the OP Mag O.D.L., which is a light fork that can be locked from the DT Swiss handlebar along with installation of a 100 mm suspension travel. As is the case with the top model, the XT Di2 is equipped with a 22-speed front derailleur. IceTech-Rotors give the Shimano hydraulic disc brakes more stability on long runs, and the DT Swiss Spline Two M1700 wheels can be easily converted to tubeless. Thanks to all these ingredients, the Eagle LTD is a fully functional Twentyniner-Hardtail.

SPEED	22 Speed
FRAME	29ER FRAME MONOCOQUE CARBON UD FINISH, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED DESIGN HEAD TUBE, 12MM THRU AXLE O.L.D. 142MM
FRAME SIZE	15", 17", 19", 21"
FORK	DT SWISS OPM 100 O.D.L TAPER REMOTE 15MM 29ER, TRAVEL: 100MM, REMOTE LOCK OUT READY
GEAR	SHIMANO, DEORE XT Di2, 22 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	9.9 KG

> Eagle XT

CARBON

29" TNT

100 mm



PAGE – 31

If you are looking for the performance of WHEELER's race-oriented Twentyniner-Hardtails at a lower price, the Eagle XT is the right choice. Its carbon frame is only minimally heavier than that of the top model. The light Float 32 fork from Fox offers 100 mm of travel and can be locked if necessary. The XT drive from Shimano is a minimalist trumpcard, because it comes without a derailleur. Since the eleven gears of the cassette range from 11 to 46 teeth, the transmission bandwidth is still sufficient. The hydraulic disc brakes and the hubs also come from the Shimano XT-group, which is known for long-lasting and precise operation. And with smooth-running Schwalbe tires, a Selle Italia XR saddle and the LevelNine handlebar, stem and seat post, these high-quality components round off the Eagle XT's features.

SPEED	11 SPEED
FRAME	29ER FRAME MONOCOQUE CARBON UD FINISH, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED DESIGN HEAD TUBE, 12MM THRU AXLE O.L.D. 142MM
FRAME SIZE	15", 17", 19", 21"
FORK	FOX PERFORMANCE 32 FLOAT SC 100MM, AIR APRING, 100MM TRAVEL, BOOST QR 15x110MM, 51MM RAKE, 3 POS LEVER, MICRO ADJ
GEAR	SHIMANO DEORE XT, 11 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	10.6 KG

Eagle SL



CARBON

29" INT

100mm

PAGE – 32

With the Eagle SL, WHEELER offers a very attractive price for entry into the world of the Twentyniner-Race hardtails in carbon frames. The Machete Comp suspension fork from Manitou offers 100 mm travel and can be easily adapted to the rider's needs and the rider's weight and can be locked when necessary. With a 22-speed drive, WHEELER uses parts from Shimano's XT and SLX groups, using a large drivetrain range - ideal for day trips with long climbs. Shimano also contributes with hydraulic disc brakes, and with brake disc at 180 mm diameter providing even more braking power at the front. With the Eagle SL on smooth-running tires from Schwalbe, one needs little else besides the Selle Italia saddle and handlebar, stem and seatpost from Levelnine.

SPEED	22 Speed
FRAME	29ER FRAME MONOCOQUE CARBON UD FINISH, 92MM BB SHELL 1 1/8" TO 1.5" INTEGRATED DESIGN HEAD TUBE, 12MM THRU AXLE O.L.D. 142MM
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 29 , AIR SPRING, HYDRAULIC DAMPING, 100MM TRAVEL, 100x15MM HEXLOCK SL
GEAR	SHIMANO DEORE SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	11.2 KG

> Eagle 3.9 / Eagle 3.7

29" TNT
100^{mm}



PAGE – 33

EAGLE 3.9

27.5" TNT
100^{mm}



EAGLE 3.7

SPEED	22 SPEED
FRAME	29ER ALLOY 6061 S.L. T/B TUBES, 73MM B.B SHELL, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE DESIGN, TOP & DOWN WITH HYDRAUFORM TUBES, WITH POST DISC MOUNT
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 29 , 1.5 TAPER REMOTE 100MM, AIR SPRING, HYDRAULIC DAMPING W/MILO REMOTE LOCK OUT, 100MM TRAVEL
GEAR	SHIMANO DEORE XT, 22 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	11.9 KG

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 S.L. T/B TUBE, 73MM B.B SHELL, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE DESIGN, TOP & DOWN WITH HYDRAUFORM TUBES, WITH POST DISC MOUNT
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 27.5, AIR SPRING, HYDRAULIC DAMPING W/MILO REMOTE LOCK OUT,100MM TRAVEL
GEAR	SHIMANO DEORE XT, 22 SPEED
BRAKE	SHIMANO DEORE XT, BR-M8000, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	11.9 KG

Eagle 4.9 / Eagle 4.7



29" TNT

100mm



EAGLE 4.9

27.5" TNT

100mm



EAGLE 4.7

SPEED	22 SPEED
FRAME	29ER ALLOY 6061 S.L. T/B TUBES, 73MM B.B SHELL, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE DESIGN, TOP & DOWN WITH HYDRAUFORM TUBES, WITH POST DISC MOUNT
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 29, AIR SPRING, HYDRAULIC DAMPING W/MILO REMOTE LOCK OUT, 100MM TRAVEL
GEAR	SHIMANO DEORE XT/ SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.1 KG

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 S.L. T/B TUBE, 73MM B.B SHELL, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE DESIGN, TOP & DOWN WITH HYDRAUFORM TUBES, WITH POST DISC MOUNT
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE COMP 27.5, AIR SPRING, HYDRAULIC DAMPING W/MILO REMOTE LOCK OUT, 100MM TRAVEL
GEAR	SHIMANO DEORE XT/ SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.1 KG

PROTRON ***SERIES***





PROTRON

> With the comfort of a suspension fork, contemporary 29 or 27.5 inch wheels, great gear selection and powerful brakes, WHEELER's Protron-Hardtails are reliable and uncomplicated companions for off-road excursions. These robust mountain bikes are also very suitable for the ride to work, school or leisure trips. In addition, aluminum hardtails offer a lot of state-of-the-art technology at an attractive price. It all begins with the newly developed frames, made of double-buttressed, hydroformed aluminum tubes. With the tapered steering tube and cable lines running internally, this frame also has some nice details to offer. WHEELER's proton models cover a wide spectrum of benefits from the low-priced beginner bikes, which are also available with light systems, fenders, stands and luggage carriers, to the high quality, highly sporty ambitious touring hardtails. And they all offer a lot of bike for the money and a avant garde style.



Protron +

27.5"
PLUS

100
mm

BOOST
STANDARD



PAGE – 37

With the Protron+, WHEELER proves to have good senses for trends. Because this aluminum hardtail rolls on voluminous, 2.8 inch-wide tires and is thus a plus bike. Off-road, the extra wide Schwalbe tires offer an enormous amount of traction, and when ridden in everyday conditions you do not need to worry about the curb edges, steps or tram tracks. As for the basis of the Protron+, the frame is made of hydroformed aluminum tubes and Manitou's machete fork, which can be finely adjusted and provides 100 mm of travel. The Shimano Deore groupset has 20 gears, and they shift even more quickly and precisely thanks to the XT rear derailleur. WHEELER also applied Shimano's proven quality traits to the hydraulic discs components. This ensures safe braking in all weather conditions. Bottom line, the Protron+ is a particularly robust Hardtail, and thanks to its voluminous tires, offers a clear advantage in safety and riding pleasure.

SPEED	20 SPEED
FRAME	27.5+ ALLOY 6061 D/B TUBES, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, BOOST 12x148MM E-THRU AXLE DESIGN
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MACHETE 27.5 PLUS 1.5 TAPER SL 15 AIR SPRING, HYDRAULIC DAMPING 100MM TRAVEL
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.9 KG

Protron 1.9



29" TNT

100 mm

PAGE – 38

If you are looking for the full power of a sporty, contemporary Twentyniner-Hardtail at an affordable price, the Protron 1.9 is just right. Because this model is built on an aluminum frame that shines with beautiful details such as internally installed cable lines. For the necessary comfort and for more control in the terrain, there is the Machete Comp-fork from Manitou with 100 mm of travel, which can be locked if necessary from the handlebar. The drive comes from Shimano's XT and SLX groups and offers 22 gears with a large gear ratio range. Because hydraulic disc brakes are a must for a contemporary mountain bike, WHEELER provides the Protron 1.9 with Shimano brakes - including a slightly larger front brake disc. The rest of the equipment can also be seen with in-house components, a saddle from Selle Italia and a smooth-running tire from Schwalbe.

SPEED	22 SPEED
FRAME	29ER ALLOY 6061 D/B TUBES , 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	15", 17", 19", 21"
FORK	MANITOU MARVEL COMP 29ER 1.5 TAPER REMOTE 150R, WITH TS AIR SPRING REMOTE LOCK OUT READY 100MM TRAVEL
GEAR	SHIMANO DEORE XT/ SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.4 KG

Protron 1.7

27.5"
100^{mm}



PAGE – 39

The Protron 1.7 offers a load of technology and a lot of value for the money. Made with triple-buttressed aluminum tubes, the frame has internal cable routing. The Machete Comp suspension fork from Manitou offers 100 mm travel and can be locked from the handlebar for long climbs on asphalt or gravel. Thanks to the 22-speed gear system, a large range of ratios is on board. The equipment of the Protron 1.9 is also of consistent high-quality, such as the Shadow Plus rear derailleur and the hydraulic disc brakes with IceTech discs that come from Shimano's XT or SLX group, known for their precise function and durability, but also do the hubs. But this is by no means the whole story, because WHEELER is also consistently well-equipping this mountain bike - from the Schwalbe tires to wheels from Alexrims to the Selle Italia saddle.

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES , 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	15",17",19",21"
FORK	MANITOU MARVEL COMP 27.5 1.5 TAPER REMOTE 150R, WITH TS AIR SPRING REMOTE LOCK OUT READY 100MM TRAVEL
GEAR	SHIMANO DEORE XT/ SLX, 22 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.6 KG

Protron 2.7



27.5"
100^{mm}

PAGE – 40

The Protron 2.7 provides some features of the top model of the series. In addition to the 27.5 inch wheels, this is particularly true for the frame: it is made of double-buttressed, hydroformed aluminum tubes and has a subtle sporty geometry and exuberates with a tidy look thanks to internal cable routing. Additionally there is a lockable Markhor fork with 100 mm travel from Manitou. On a off-road excursion, you also cannot do without the 20 speed gear set. This comes from Shimano's Deore groups and is upgraded with an XT-derailleur. WHEELER uses Shimano's hydraulic disc brakes on the Protron 2.7 for reliable deceleration in any weather. The equipped saddle from Selle Italia and the smooth-running Rocket Ron tires from Schwalbe are also evidently high performing.

SPEED	20 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES , 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	15",17",19",21"
FORK	MANITOU MARKHOR 27.5 1.5 TAPER REMOTE TS AIR SPRING REMOTE LOCK OUT READY 100MM TRAVEL
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.6 KG



Protron 3.9

29" TNT
100 mm



PAGE — 41

If you're looking for a versatile and comfortable 29er-Hardtail, the Protron 3.9 is just right. With its 29-inch wheels, it is definitely cutting edge. The double-buttressed aluminum frame provides one with a moderate sitting position, which is well-suited to a rider wearing a backpack. Because it is suspended by an air shock, the 30 Silver TK fork of Rock Shox can be fine-tuned to the driver's weight with its 100 mm travel. The Deore drive offers 20 speeds and an enormous range of gear ratios. Shimano's hydraulic disc brakes, which ensure safe deceleration in all weather conditions, are also paired with the fast-rolling Rapid Rob tires by Schwalbe and a host of WHEELER's in-house components.

SPEED	20 SPEED
FRAME	29" ALLOY 6061 D/B TUBE, 1 1/8" INTEGRATED HEAD TUBE, FORGED REPLACABLE DROP OUT
FRAME SIZE	15",17",19",21"
FORK	ROCK SHOX FS 30S TK 29 Q SA 100 BLK 51AL, AIR SPRING TURNKEY LOCKOUT, 100MM TRAVEL
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-M315, DISC BRAKE, F:180MM/ R:160 MM ROTORS
WEIGHT	13.4 KG

Protron 3.7 / Protron 4.7



27.5"
100^{mm}



PROTRON 3.7

27.5"
100^{mm}



PROTRON 4.7

SPEED	20 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	13", 15", 17", 19"
FORK	ROCK SHOX FS 30S TK 27 Q SA 100 BLK 42AL, AIR SPRING, TURNKEY LOCKOUT, 100MM TRAVEL
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO BR-M315, DISC BRAKE, F:180MM/ R:160 MM ROTORS
WEIGHT	13.2 KG

SPEED	27 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	13", 15", 17", 19"
FORK	SR SUNTOUR SF15-XCM-HLO DS 27.5 COIL SPRING WITH HYDRAULIC LOCK OUT 100MM TRAVEL
GEAR	SHIMANO ACERA, 27 SPEED
BRAKE	SHIMANO ACERA BR-M3050, DISC BRAKE, F : 180MM/ R: 160MM ROTORS
WEIGHT	13.9 KG



Protron 5.7 / Protron Street

27.5"
100^{mm}



PROTRON 5.7

27.5"
100^{mm}



PROTRON STREET

PAGE — 43

SPEED	24 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	13", 15", 17", 19"
FORK	SR SUNTOUR SF16-XCT-HLO DS27.5 ALLOY SUSPENSION FORK, COIL SPRING WITH HYDRAULIC LOCK OUT TRAVEL 100MM
GEAR	SHIMANO TOURNEY, 24 SPEED
BRAKE	SHIMANO BR-M315, DISC BRAKE, F:180MM/ R:160 MM ROTORS
WEIGHT	14.2 KG

SPEED	30 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" INTEGRATED HEAD TUBE, TOP TUBE WITH INTERNAL CABLE ROUTING
FRAME SIZE	15", 17", 19", 21"
FORK	RST AERIAL 27.5 TNL, AIR SPRING TURN KEY LOCK OUT, 100MM TRAVEL WITH FENDER MOUNT
GEAR	SHIMANO DEORE, 30 SPEED
BRAKE	SHIMANO BR-MT500, DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

Protron ATB



27.5"
100^{mm}

PAGE – 44

If you are looking for a functional mountain bike for moderate journeys on the road as well as for everyday life, the Protron ATB is just about right. The frame is made of doublebutted, hydroformed Aluminum tubes and offers a comfortable seat position, which is ideal for riding in traffic. Also provided is a lockable XCT ATB HLO fork from Suntour with 100mm travel and a Shimano drivetrain with 24 speeds that are part of the standard equipment of the Protron ATB. In addition, there are the 27.5 inch wheels and the hydraulic disc brakes from Shimano. Furthermore, a Nabendynamo from Shimano, a lighting system from Spanninga with parking light function, 60mm wide fenders, luggage carriers and stands are all installed as standard. This makes the Protron ATB as versatile as it is affordable.

SPEED	24 SPEED
FRAME	27.5" ALLOY 6061 P/G TUBES , 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	13", 15",17",19"
FORK	SR SUNTOUR SF18-XCT-ATB DS27.5, COIL SPRING W/PRELOAD ADJUST AND FENDER MOUNT 100MM TRAVEL
GEAR	SHIMANO TOURNEY, 24 SPEED
BRAKE	SHIMANO BR-M315, DISC BRAKE, F:180MM/ R:160 MM ROTORS
WEIGHT	15.4 KG



PASSERA *SERIES*

PASSERA

➤ Sporty bikers benefit from modern bikes with easy-to-operate gears, reliable disc brakes and geometries, saddles, handlebars and handles adapted to the female anatomy. Because when a mountain bike can be ridden comfortably, treks in countryside trails are much more fun and enjoyable. With four full-suspension models, three hardtails and two models for daily commutes, WHEELER's Passera range offers the right bike for every palate and budget. For a balanced mix of propulsion, agility and joyous handling, the Passera models roll on 27.5 inch wheels. In addition to ergonomical parts, WHEELER also places great importance on simple operation and modern details. By this principle, internally routed cable lines ensures a clean look and precise frame and component color accents ensures a fresh style. Lastly, the Passera frames are designed by the brand in such a way that they offer a generous sizes for freedom of movement.

Passera SL

CARBON

27.5"

130 mm

**ROD
SEAT
POST**

**BOOST
STANDARD**



PAGE — 47

Sophisticated bikers with a preference for technical trails are just right for the Passera SL. A light and stiff carbon frame set serves as the foundation. Thanks to the 148 mm wide Boost rear wheel axle, the rear subframe is even stiffer, and it also accommodates up to 2.6 inch-wide tires. The 130 mm of travel paired together with the 27.5 inch wheels give a surprisingly supple ride through rough paths. The Float DPS shock and the 34 float fork both come from Fox and can be locked from the handlebar with only one lever. WHEELER propels this model with 12 gears and stops with disc brakes using parts from SRAM's Eagle GX group while DT Swiss supplies with the Spline M1900 wheels. A LEV SI- vario seatpost by Kind Shock is provided, which allows the saddle to be lowered quickly from the handlebars. The equipment is rounded off by LevelNine components and a saddle fitting for the female anatomy.

SPEED	12 SPEED
FRAME	27.5" CARBON MONOCOQUE SUSPENSION FRAME 4 BAR LINKAGE TYPE, TRAVEL 130MM, WITH 12x148MM BOOST THRU AXLE
FRAME SIZE	15", 17", 19"
FORK	FOX RHYTHM 34 FLOAT 130MM 2 POS REMOTE, 15QR, AIR SPRING PRESSURE TRAVEL 130MM, 44MM RAKE BOOST QR 15x110mm
REAR SHOCK	FOX PERFORMANCE ELITE FLOAT 3 POS REMOTE LV EVOL
GEAR	SRAM SL GX EAGLE, 12 SPEED
BRAKE	SRAM, LEVEL TL, DISC BRAKE F: 180MM/ R: 180MM ROTORS
WEIGHT	12.6 KG

Passera 13



27.5"

130^{mm}

ROP
SEAT
POST

BOOST
STANDARD

PAGE — 48

The Passera 13 offers sporting mountain bikers some wow factors: The frame is made of double-buttressed aluminum tubes, has a 148 mm wide boost axle at the rear and emits a very clean look. The combination of 130 mm rear travel and 27.5 inch wheels offers generous comfort on rougher terrains. The suspension components are a Monarch RT3 shock and a Revelation RL fork both from Rock Shox. Shimano's hydraulic disc brakes and a 22-speed gearset from the XT and SLX group are also as equipped. Thanks to the optimized control of the Side Swing technology, the derailleur shifts precisely and quickly. And also with the Passera 13, a LEV Integra vario seatpost allows a rapid lowering of the ergonomic female saddle from the handlebar.

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TRAVEL 130MM
FRAME SIZE	15", 17", 19"
FORK	ROCK SHOX, FS REVELATION RL REMOTE BOOST TAPER SA 15, 27.5 BOOST 15X110 MXL STEALTH SOLO AIR, 130 OF BLACK TAPER, WITH ONE LOC SPRINT TALL RIGHT
REAR SHOCK	ROCK SHOX RS MONARCH RT3, 190MM LENGTH, 22.2MMx8MM HARDWARE, DEBON AIR, REBOUND, 3-POSITION FLOODGATE
GEAR	SHIMANO SLX / XT, 22 SPEED
BRAKE	SHIMANO XT, BR-M8000 DISC BRAKE, F: 180MM/ R: 180MM ROTORS
WEIGHT	13.9 KGS

> Passera 23

27.5"

130^{mm}

BOOST
STANDARD



PAGE – 49

WHEELER offers performance at an affordable price with the Passera 23. The frame is constructed of double-buttressed aluminum tubes and also offers a 148 mm wide boost axle, neatly laid cable lines as well as 130 mm of rear travel. Together with the 27.5 inch wheels, this results in considerably supple ride through rough terrains. The Revelation RL fork and the Monarch RT shock by Rock Shox can be fine-tuned to the rider's weight. Whether uphill on a steep mountain or downhill very rapidly: The Shimano XT-SLX drive delivers the right ratio with its 22 gears. The Shimano hydraulic disc brakes also come from the same group. As for the tires, WHEELER again has brought on-board the brand name Schwalbe to supply the Passera 23. Lastly, the rest of the components such as the handles, saddle and handlebar are WHEELER in-house parts and are adapted to the female anatomy.

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TRAVEL 130MM
FRAME SIZE	15",17",19"
FORK	ROCK SHOX, REVELATION RL-A5, 27.5 BOOST 15X110 MXL LITE, SOLO AIR 130 DF BLACK TAPER
REAR SHOCK	ROCK SHOX RS MONARCH RT, 200MM LENGTH, 22.2MMx8MM HARDWARE, DEBON AIR, REBOUND, 2-POSITION COMPRESSION
GEAR	SHIMANO SLX / XT, 22 SPEED
BRAKE	SHIMANO, BR-M447, DISC BRAKE, F / R:180MM ROTORS
WEIGHT	13.9 KGS

Passera 33



27.5"

130^{mm}

**BOOST
STANDARD**

PAGE – 50

The Passera 33 is WHEELER's best-priced, full-suspension mountain bike for women and with a lot to offer. The frame is constructed from double-buttressed aluminum tubes, and the model offers 130mm rear travel, internal cable routing and a 148 mm-wide boost rear axle. Coupled with the 27.5 inch wheels, supple riding comforts are on board for rough terrain trekking . Furthermore, the Silver RL fork and the Monarch RT shock by Rock Shox are adjustable per rider weight. There are also no compromises in gear selection and brakes: The Shimano's Deore Group has 20 speeds and is stopped by Shimano's hydraulic disc brakes. In addition, the Schwalbe tires come with particularly good puncture protection and the miscellaneous components such as the handles, handlebar and the saddle are all ergonomically designed parts suitable for women.

SPEED	20 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, TRAVEL 130MM
FRAME SIZE	15", 17", 19", 21"
FORK	ROCK SHOX, FS SEKTOR SILVER RL 27.5" BOOST, 15MM AXLE LIGHT, SOLO AIR 130MM DIFFUSION BLACK
REAR SHOCK	ROCK SHOX RS MONARCH RT, 200MM LENGTH, 22.2MMx8MM HARDWARE, DEBON AIR, REBOUND, 2-POSITION COMPRESSION
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO, BR-M315, DISC-BRAKE, F:180MM/R:180MM ROTORS
WEIGHT	14.2 KGS



Passera 1.7 / Passera 2.7

27.5"
100^{mm}



PASSERA 1.7

PAGE — 51



27.5"
100^{mm}



PASSERA 2.7

SPEED	22 SPEED
FRAME	27.5" ALLOY 6061 D/B TUBES, 1 1/8" TO 1.5" INTEGRATED HEAD TUBE, FD WITH SIDE WING DESIGN
FRAME SIZE	15",17",19", 21"
FORK	MANITOU MACHETE COMP 27.5, 1.5 TAPER REMOTE 100MM, WITH TS AIR SPRING, HYDRAULIC DAMPING W/MILO REMOTE LOCK OUT, 100MM TRAVEL
GEAR	SHIMANO DEORE SLX, 22SPEED
BRAKE	SHIMANO, BR-MT500 DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	11.9 KG

SPEED	20 SPEED
FRAME	27.5" ALLOY 6061 P/G TUBES, 1 1/8" INTEGRATED HEAD TUBE, FORGED REPLACABLE DROP OUT
FRAME SIZE	13",15",17",19"
FORK	ROCK SHOX FS 30S TK 27 Q SA 100 BLK 42AL, AIR SPRING, TURNKEY LOCKOUT ,100MM TRAVEL
GEAR	SHIMANO DEORE, 20 SPEED
BRAKE	SHIMANO, BR-M315 DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	12.9 KG

Passera 3.7 / Passera ATB



27.5"
100^{mm}



PASSERA 3.7

27.5"
100^{mm}



PASSERA ATB

PAGE - 52

SPEED	24 SPEED
FRAME	27.5" ALLOY 6061 P/G TUBES, 1 1/8" INTEGRATED HEAD TUBE, FORGED REPLACABLE DROP OUT
FRAME SIZE	13",15",17",19"
FORK	SR SUNTOUR SF16-XCT-HLO DS27.5 COIL SPRING, HYDRAULIC DAMPING LOCK OUT, 100MM TRAVEL.
GEAR	SHIMANO ACERA/ TOURNEY, 24 SPEED
BRAKE	SHIMANO, BR-M315 DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	13.9 KG

SPEED	24 SPEED
FRAME	27.5" ALLOY 6061 P/G TUBES, 1 1/8" INTEGRATED HEAD TUBE, FORGED REPLACABLE DROP OUT
FRAME SIZE	13",15",17",19"
FORK	SR SUNTOUR SF18-XCT-ATB DS27.5 COIL SPRING, W/PRELOAD ADJUST AND FENDER MOUNT, 100MM TRAVEL
GEAR	SHIMANO ACERA/ TOURNEY, 24 SPEED
BRAKE	SHIMANO, BR-M315 DISC BRAKE, F: 180MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

ALLEY SERIES





ALLEY

➤ For recreational cyclists, it may be desirable to have racing bike tires that are slightly wider for comfort, safety and puncture protection. This is important for occasional trips over unpaved routes. The so-called gravel bikes, literally for going over gravel, have already matured with a lively niche in the United States and have their own races across all the states. This trend has now jumped across the Atlantic pond. By that, WHEELER has a number of options for those who want to leave roads behind. If you're looking for a challenge in the terrains, you'll find the Alley CX Cyclo-cross race model worthy, a true performer with a carbon frame that has already proven itself in some competitions. Those who prefer long road trips with occasional detours on gravel or prefer a minimalist, fast commuter bike, are right on the money in the other three Alley models. WHEELER offers the choice of a sporty model with an aluminum frame and disc brakes, or a lifestyle-oriented model with aluminum or matte steel frame.

> Alley CX / Alley Race

CARBON

ULTEGRA Di2
DIGITAL ELECTRONIC SHIFTER

HY.....
DISC BRAKE

HY.....
DISC BRAKE



ALLEY CX



ALLEY RACE

PAGE — 55

SPEED	22 SPEED
FRAME	700C FRAME MONOCOQUE CARBON UD FINISH, A CLASS CARBON FIBER, DISC BRAKE FLAT MOUNT, 12MM THRU AXLE OLD 142MM
FRAME SIZE	52,55,58 CM
FORK	700C CARBON MONOCOQUE CYCLE CROSS FORK, CARBON TAPERED STEER OVAL BLADES, POST FLAT DISC MOUNT, 12MM x 100MM THRU AXLE DESIGN.
GEAR	SHIMANO ULTEGRA, 22SPEED
BRAKE	SHIMANO ULTEGRA, BR-R8070, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	8.3 KG

SPEED	22 SPEED
FRAME	700C ALLOY 6061 SL T/B TUBES, TOP AND DOWN WITH HYDRAFORM TUBES WITH I TYPE 142MM THRU AXLE AND DISC BRAKE FLAT MOUNT
FRAME SIZE	46,49,52,55,58 CM
FORK	700C ALLOY UNI-CROWN FORK WITH 1 1/8" TO 1.5" TAPER STEER, FORGED END
GEAR	SHIMANO RS505, 22SPEED
BRAKE	SHIMANO BR-RS505, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	9.9 KG

Alley Pure / Alley Wood



HY.....
DISC BRAKE



ALLEY PURE



ALLEY WOOD

PAGE — 56

SPEED	22 SPEED
FRAME	700C ALLOY 6061 SL T/B TUBES, WITH I TYPE 142MM THRU AXLE AND DISC BRAKE FLAT MOUNT
FRAME SIZE	46,49,52,55,58 CM
FORK	700C, ALLOY UNI-CROWN FORK WITH 1 1/8" TO 1.5" TAPER STEER, FORGED END
GEAR	SHIMANO SLU5000, 22SPEED
BRAKE	SHIMANO BR-U5000, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	10.2 KG

SPEED	18 SPEED
FRAME	700C TIG WELDING, FULL CR-MO D/B TUBES, 1 1/8" INTERGRATED HEAD TUBE
FRAME SIZE	50,55,58 CM
FORK	UNICROWN FORK, HI-TEN STEER CR-MO STRAIGHT BLADES
GEAR	SHIMANO SORA, 18 SPEED
BRAKE	TEKTRO, R-539, CALIPER BRAKE
WEIGHT	11.4 KGS





ECORIDER ***SERIES***

ECORIDER

> From the particularly low-priced Basic through the visually striking Inspire to the Premium model, WHEELER's Ecorider bikes are outstanding examples of good price-to-performance ratio. Nevertheless, they do not compromise on equipment: an aluminum frame, a wide range of gears and powerful brakes are all essential in the series. With the exception of the Basic, hydraulic brakes are standard, which brake exceptionally in any weather. Just as indispensable are the complete everyday equipments: from the mudguards, the luggage rack, the modern lighting systems to the nabendynamos built by Shimano. To ensure that the exciting Ecorider model does not fall into the hands of the wrong people, WHEELER also provides it with a permanently installed frame lock. The result is convincing functionality in a visually pleasing everyday bike. Despite the complete equipment, the weight of every Ecorider model remains competent.

Ecorider Premium Man



PAGE – 59

If you are looking for quality and an excellent price-to-performance ratio, the Ecorider Premium Man is the right one. Since the Racktime luggage carrier and the rear fender are specially adapted to the aluminum frame, the bike offers a neat look. The NEX HLO DS fork from Suntour with 50 mm of travel and a seatpost with a 40 mm travel ensure a very comfortable ride. WHEELER uses the complete Deore groupset of Shimano for the components. The 30 gears provide an enormous gear range. The standard hydraulic disc brakes, which provide reliable deceleration in all weather conditions, are also important to mention here. The image of a high-quality, fully-equipped everyday bike is rounded off with parts such as the E3 Pure LED headlights from Supernova, the Nabendynamo from Shimano, SKS fenders and a saddle from Selle Royal.

SPEED	30 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	48,52,56,60 CM
FORK	SR SUNTOUR, NEX-HLO-DS-700, WITH HYDRAULIC DAMPING LOCK OUT, TRAVEL 50MM
GEAR	SHIMANO DEORE, 30 SPEED
BRAKE	SHIMANO BR-M395, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.5 KG

Ecorider Inspire Lady



PAGE – 60

SPEED	27 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	SR SUNTOUR, NEX-DS-700, WITH PRELOAD ADJUST, TRAVEL 50MM
GEAR	SHIMANO ALIVIO, 27 SPEED
BRAKE	SHIMANO BR-M365, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

SPEED	27 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	SR SUNTOUR, NEX-DS-700, WITH PRELOAD ADJUST, TRAVEL 50MM
GEAR	SHIMANO ALIVIO, 27 SPEED
BRAKE	SHIMANO BR-M365, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

Ecorider Inspire DI



PAGE — 61



SPEED	27 SPEED
FRAME	700C ALLOY 6061 P.G. LADY DEEP INSTEP, 1 1/8" INTERGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	SR SUNTOUR, NEX-DS-700, WITH PRELOAD ADJUST, TRAVEL 50MM
GEAR	SHIMANO ALIVIO, 27 SPEED
BRAKE	SHIMANO BR-M365, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

SPEED	27 SPEED
FRAME	700C ALLOY 6061 P.G. LADY DEEP INSTEP, 1 1/8" INTERGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	SR SUNTOUR, NEX-DS-700, WITH PRELOAD ADJUST, TRAVEL 50MM
GEAR	SHIMANO ALIVIO, 27 SPEED
BRAKE	SHIMANO BR-M365, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.9 KG

Ecorider Inspire Man



PAGE – 62

The Ecorider Inspire man is a fully equipped and comfortable bike with a unique look. The Suntour NEX DS fork with 50 mm of travel and the seat post with 40 mm of travel take on bumpy routes and prevent impact from harsh grounds, while the aluminum frame keeps the weight low. The 27 speed Shimano gearset provides the right gear for any situation, and the hydraulic disc brakes quickly bring the bike to a standstill in any weather. The rest of the equipment are the hub dynamo from Shimano, the Kendo XDO LED headlights from Spanninga, stainless steel mudguards as well as a luggage rack from Racktime. For even more functionality in everyday life, a side-stand and a permanently installed frame lock should be mentioned.

SPEED	27 SPEED
FRAME	700C ALLOY 6061 P/G TUBES, 1 1/8" INTERGRATED HEAD TUBE
FRAME SIZE	48,52,56,60 CM
FORK	SR SUNTOUR, NEX-DS-700, WITH PRELOAD ADJUST, TRAVEL 50MM
GEAR	SHIMANO ALIVIO, 27 SPEED
BRAKE	SHIMANO BR-M365, DISC BRAKE, F: 160MM/ R: 160MM ROTORS
WEIGHT	15.9 KG



Ecorider Basic Lady



101-002-7127 / WHITE-BLUE



101-002-7128 / BLUE-BLACK



101-002-7129 / BLACK-BLUE

PAGE — 63

SPEED	24 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	WHEELER ALLOY RIGID FORK
GEAR	SHIMANO ALTUS, 24 SPEED
BRAKE	TEKTRO, ALLOY V-BRAKE
WEIGHT	14.9 KG

SPEED	24 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	44, 48, 52 CM
FORK	WHEELER ALLOY RIGID FORK
GEAR	SHIMANO ALTUS, 24 SPEED
BRAKE	TEKTRO, ALLOY V-BRAKE
WEIGHT	14.9 KG

Ecorider Basic Man



PAGE – 64

With the Ecorider Basic Man, WHEELER offers a fully-equipped everyday bike at a veritable price. The aluminum frame and the rigid fork serve as a light basis. A 24 speed Shimano gearset is fitted to provide the right gear for each situation. Powerful V-brakes from Tektro ensure that you can always stop quickly. With the lighting systems, the rider gets a Nabendynamo by Shimano and a Spanninga lighting system including a stand-by function, a modern technology. Robust stainless steel fenders, a functional luggage carrier, a side stand and a permanently installed frame lock complete the functional everyday features of the Ecorider Basic Man.

SPEED	24 SPEED
FRAME	700C ALLOY 6061 P.G., 1 1/8" INTEGRATED HEAD TUBE
FRAME SIZE	48,52,56,60 CM
FORK	WHEELER ALLOY RIGID FORK
GEAR	SHIMANO ALTUS, 24 SPEED
BRAKE	TEKTRO, ALLOY V-BRAKE
WEIGHT	14.9 KG

ROUTE SERIES



A silver and black road bike with 'Rover' branding on the frame, featuring drop handlebars, a black saddle, and disc brakes. The bike is positioned in the foreground, angled towards the right. The background is a collage of vintage cycling photographs, including a cyclist on a road bike, a cyclist on a mountain bike, a cyclist on a track bike, and a cyclist on a bicycle with a large 'WHEELER' sign. The overall aesthetic is nostalgic and emphasizes the brand's heritage.

PAGE - 65

ROUTE AERO 6.0



E - 66

SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	47, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO ULTEGRA
BRAKE	SHIMANO ULTEGRA - DIRECT MOUNT TYPE
WHEEL SET	MAVIC KSYRIUM 25C
WEIGHT	7.8KG

SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	47, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO ULTEGRA
BRAKE	SHIMANO ULTEGRA - DIRECT MOUNT TYPE
WHEEL SET	MAVIC KSYRIUM 25C
WEIGHT	7.8KG

ROUTE AERO 5.0



PAGE – 67



SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	47, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105 - DIRECT MOUNT TYPE
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	8.1KG

SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	47, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105 - DIRECT MOUNT TYPE
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	8.1KG



SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	45, 48, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	8.1KG

SPEED	22 SPEED
FRAME	700C AERO CARBON MONOCOQUE FRAME
FRAME SIZE	45, 48, 50, 52, 54CM
FORK	CARBON MONOCOQUE FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	8.1KG



PAGE – 69



SPEED	22 SPEED
FRAME	ALLOY LIGHT 6069 D/B FRAME
FRAME SIZE	45, 48, 50, 52, 54CM
FORK	CARBON FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	9.3KG

SPEED	22 SPEED
FRAME	ALLOY LIGHT 6069 D/B FRAME
FRAME SIZE	45, 48, 50, 52, 54CM
FORK	CARBON FORK
GEAR	SHIMANO 105
BRAKE	SHIMANO 105
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	9.3KG



WHEELER NEW GRAVEL BIKE FRAME
C.T.G- COMFORT TOURING GEOMETRY
INTERNAL CABLE ROUTING





SPEED	20 SPEED
FRAME	700C ALLOY 6061 FRAME
FRAME SIZE	42, 45, 48, 50, 52, 54CM
FORK	ALLOY FORK
GEAR	SHIMANO TIAGRA
BRAKE	TEKTRO MD-C510 DISC BRAKE - FLAT MOUNT
WHEEL SET	WHEELER F:2 / R:4 SEAL BEARING WHEEL SET
WEIGHT	10.5KG

FULLY

HARDTAIL

COMFORT

DEEP INSTEP

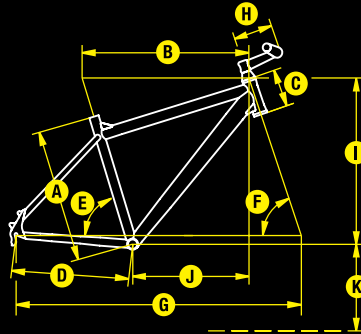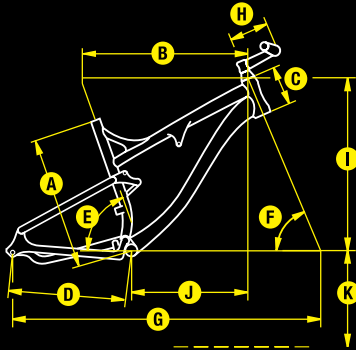

- A** SEAT TUBE LENGTH
- B** TOP TUBE HORIZONTAL LENGTH
- C** HEAD TUBE LENGTH
- D** CHAINSTAY LENGTH
- E** SEAT TUBE ANGLE
- F** HEAD TUBE ANGLE
- G** WHEEL BASE
- H** STEM LENGTH
- I** STACK
- J** REACH
- K** BOTTOM BRACKET HIGH

BRAZILIAN SE

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	440	575	95	438	75°	86°	1170	45	609	416	353
19"	480	599	110	438	75°	86°	1195	55	622	435	353
21"	520	625	125	438	75°	86°	1223	65	636	456	353

BRAZILIAN SE+

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	440	575	95	438	75°	86°	1170	45	609	416	340
19"	480	599	110	438	75°	86°	1195	55	622	435	340
21"	520	625	125	438	75°	86°	1223	65	636	456	340

BRAZILIAN HD

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	440	575	95	438	75°	86°	1170	45	609	416	353
19"	480	599	110	438	75°	86°	1195	55	622	435	353
21"	520	625	125	438	75°	86°	1223	65	636	456	353

BRAZILIAN HD+

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	440	575	95	438	75°	86°	1170	45	609	409	340
19"	480	599	110	438	75°	86°	1195	55	622	435	340
21"	520	625	125	438	74.5°	86°	1223	65	636	456	340

FALCON RC TEAM

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	395	560	95	440	74.5°	68.8°	1098	70	582	397.5	330
17"	445	580	105	440	74.5°	68.8°	1120	80	591	416	330
19"	485	600	115	440	74.5°	68.8°	1141	90	601	433	330
21"	535	630	125	440	74.5°	68.8°	1172	100	610	461	330

FALCON LTD

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	445	580	105	440	74.5°	68.8°	1120	80	591	418	330
19"	485	600	115	440	74.5°	68.8°	1141	90	601	433	330
21"	535	630	125	440	74.5°	68.8°	1172	100	610	461	330

FALCON SE

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
17"	445	583	105	440	73.5°	67.8°	1128	80	599	405	335
19"	485	603	115	440	73.5°	67.8°	1149	70	608	422	335
21"	535	633	125	440	73.5°	67.8°	1180	80	618	450	335

FALCON 12

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	395	562	95	440	73.5°	67.8°	1105	60	589	387	335
17"	445	583	105	440	73.5°	67.8°	1128	80	599	405	335
19"	485	603	115	440	73.5°	67.8°	1149	70	608	422	335
21"	533	633	125	440	73.5°	67.8°	1180	80	618	450	335

FALCON 22

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	395	562	95	440	73.5°	67.8°	1105	60	589	387	335
17"	445	583	105	440	73.5°	67.8°	1128	80	599	405	335
19"	485	603	115	440	73.5°	67.8°	1149	75	608	422	335
21"	533	633	125	440	73.5°	67.8°	1180	90	618	450	335

FALCON 32

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	395	562	105	440	74°	67.8°	1112	60	599	391	335
17"	445	583	105	440	73.8°	67.8°	1130	80	599	408	335
19"	485	603	115	440	73.5°	67.8°	1149	80	608	422	335
21"	533	633	125	440	73.5°	67.8°	1178	90	618	449	335

FALCON 42

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	395	562	105	440	74°	67.8°	1112	60	599	391	335
17"	445	583	105	440	73.8°	67.8°	1130	80	599	408	335
19"	485	603	115	440	73.5°	67.8°	1149	80	608	422	335
21"	533	633	125	440	73.5°	67.8°	1178	90	618	449	335

EAGLE TEAM

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	580	105	442	73°	69.5°	1081	70	618	385	310
17"	432	600	105	442	73°	69.5°	1101	80	618	405	310
19"	483	620	115	442	73°	69.5°	1121	90	627	422	310
21"	533	640	125	442	73°	69.5°	1142	100	637	439	310

EAGLE LTD											
SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	580	105	442	73°	69.5°	1081	70	618	385	310
17"	432	600	105	442	73°	69.5°	1101	80	618	405	310
19"	483	620	115	442	73°	69.5°	1121	90	627	422	310
21"	533	640	125	442	73°	69.5°	1142	100	637	439	310

EAGLE 3.9

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	575	105	440	74°	69.5°	1092	60	605	402	312
17"	432	600	105	440	74°	69.5°	1116	60	605	427	312
19"	483	620	115	440	74°	69.5°	1137	75	614	444	312
21"	533	640	130	440	74°	69.5°	1157	90	628	460	312

EAGLE 4.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	575	105	425	74°	69.5°	1078	60	588	406	312
17"	432	600	105	425	74°	69.5°	1102	70	588	431	312
19"	483	620	115	425	74°	69.5°	1124	80	598	448	312
21"	533	640	130	425	74°	69.5°	1145	90	611	464	312

PROTRON 1.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	430	74°	69.5°	1072	60	606	391	310
17"	432	580	125	430	74°	69.5°	1088	70	615	403	310
19"	483	608	125	430	74°	69.5°	1116	80	615	431	310
21"	533	620	135	430	74°	69.5°	1129	90	625	440	310

PROTRON 3.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	115	435	74°	69.5°	1048	60	604	359	310
15"	381	565	115	435	74°	69.5°	1078	60	604	391	310
17"	432	580	125	435	74°	69.5°	1094	70	613	404	310
19"	483	608	125	435	74°	69.5°	1122	80	613	432	310
21"	533	620	135	435	74°	69.5°	1135	90	623	441	310

PROTRON STREET

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	445	74°	69.5°	1099	60	595	394	310
17"	432	580	125	435	74°	69.5°	1105	70	605	406	310
19"	483	608	125	435	74°	69.5°	1133	80	605	434	310
21"	533	620	135	435	74°	69.5°	1146	90	614	443	310

PASSERA 13

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
15"	394	557	100	430	74.5°	67.5°	1110	60	578	403	335
17"	445	577	110	430	74.5°	67.5°	1128	60	583	418	335
19"	483	597	120	430	74.5°	67.5°	1147	80	596	432	335

PASSERA 1.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
15"	381	550	110	430	73.5°	69.5°	1057	60	601	377	310
17"	432	570	120	430	73.5°	69.5°	1077	70	610	395	310
19"	483	590	120	430	73.5°	69.5°	1097	80	610	415	310

EAGLE XT

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	580	105	442	73°	69.5°	1081	60	618	385	310
17"	432	600	105	442	73°	69.5°	1101	60	618	405	310
19"	483	620	115	442	73°	69.5°	1121	75	627	422	310
21"	533	640	125	442	73°	69.5°	1142	90	637	439	310

EAGLE 3.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	575	105	425	74°	69.5°	1078	60	588	406	312
17"	432	600	105	425	74°	69.5°	1102	60	588	431	312
19"	483	620	115	425	74°	69.5°	1124	75	598	448	312
21"	533	640	130	425	74°	69.5°	1145	90	611	464	312

PROTRON +

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	445	74°	68.3°	1106	60	621	387	310
17"	432	580	125	445	74°	68.3°	1122	70	630	399	310
19"	483	608	125	445	74°	68.3°	1150	80	630	427	310
21"	533	620	135	445	74°	68.3°	1163	90	642	436	310

PROTRON 2.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	430	74°	69.5°	1072	60	606	391	310
17"	432	580	125	430	74°	69.5°	1088	70	615	403	310
19"	483	608	125	430	74°	69.5°	1116	80	615	431	310
21"	533	620	135	430	74°	69.5°	1129	90	625	440	310

PROTRON 4.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	115	435	74°	69.5°	1046	60	604	359	310
15"	381	565	115	435	74°	69.5°	1078	60	604	391	310
17"	432	580	125	435	74°	69.5°	1094	70	613	404	310
19"	483	608	125	435	74°	69.5°	1122	80	613	432	310
-	-	-	-	-	-	-	-	-	-	-	-

PROTRON AT8

SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	115	435	74.°	69.5°	1049	60	604	391	310
15"	381	565	115	435	74°	69.5°	1081	60	613	404	310
17"	432	580	125	435	74°	69.5°	1097	75	613	432	310
19"	483	608	125	435	74°	69.5°	1125	90	623	441	310

PASSERA 23

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
15"	394	557	100	430	74.5°	67.5°	1110	60	578	403	335
17"	445	577	110	430	74.5°	67.5°	1128	60	583	418	335
19"	483	597	120	430	74.5°	67.5°	1147	80	596	432	335

PASSERA 2.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	110	435	74°	69.5°	1048	60	598	361	310
15"	381	550	110	435	74°	69.5°	1064	60	598	378	310
17"	432	570	120	435	74°	69.5	1085	60	608	396	310
19"	483	590	120	435	74°	69.5°	1105	75	608	415	310

EAGLE SL

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	580	105	442	73°	69.5°	1081	60	618	385	310
17"	432	600	105	442	73°	69.5°	1101	60	618	405	310
19"	483	620	115	442	73°	69.5°	1121	75	627	422	310
21"	533	640	125	442	73°	69.5°	1142	90	637	439	310

EAGLE 4.9

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	575	105	440	74°	69.5°	1092	60	605	402	312
17"	432	600	105	440	74°	69.5°	1116	70	605	427	312
19"	483	620	115	440	74°	69.5°	1137	80	614	444	312
21"	533	640	130	440	74°	69.5°	1137	90	628	460	312

PROTRON 1.9

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	440	74°	69.5°	1082	60	635	382	310
17"	432	580	125	440	74°	69.5°	1097.	70	645	395	310
19"	483	608	125	440	74°	69.5°	1125	80	645	423	310
21"	533	620	135	440	74°	69.5°	1138	90	654	432	310

PROTRON 3.9

SIZE	A	B	C	D	E	F	G	H	I	J	K
15"	381	565	115	446	74°	69.5°	1087	60	635	382	310
17"	432	580	125	446	74°	69.5°	1102	70	645	395	310
19"	483	608	125	446	74°	69.5°	1130	80	645	423	310
21"	533	620	135	446	74°	69.5°	1143	90	654	432	310

PROTRON 5.7

SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	115	435	74.5°	69.5°	1046	60	604	359	310
15"	381	565	115	435	74°	69.5°	1077	60	604	391	310
17"	432	580	125	435	74°	69.5°	1094	70	613	404	310
19"	483	608	125	435	74°	69.5°	1122	80	613	432	310
-	-	-	-	-	-	-	-	-	-	-	-

PASSERA SL

SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
15"	394	557	100	430	74.5°	67.5°	1104	60	574	398	335
17"	445	577	110	430	74.5°	67.5°	1125	70	593	415	335</

PASSERA ATB											
SIZE	A	B	C	D	E	F	G	H	I	J	K
13"	330	533	110	435	74°	69.5°	1049	60	607	358	310
15"	381	550	110	435	74°	69.5°	1061	60	607	376	310
17"	432	570	120	435	74	69.5°	1086	60	617	393	310
19"	483	590	120	435	74°	69.5°	1106	75	617	413	310

ALLEY PURE											
SIZE	A	B	C	D	E	F	G	H	I	J	K
46cm											
49cm	490	515	130	435	74°	72°	997~	70	569	356	280
52cm	520	540	160	435	74°	72°	1018	80	597	373	280
55cm	550	570	190	435	74°	72.5°	1049	90	627	395	280
59cm	590	600	225	435	74°	73°	1077	100	660	416	280

ECORIDER PREMIUM MAN											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	440	565	140	451	72°	70°	1054	80	-	-	-
52cm	480	580	140	451	72°	70°	1069	80	-	-	-
55cm	520	595	140	451	72°	70°	1084	100	-	-	-
60cm	-	-	-	-	-	-	-	-	-	-	-

ECORIDER INSPIRE MAN											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	440	560	170	451	72°	70°	1050	80	-	-	-
50cm	480	570	170	451	72°	70°	1060	80	-	-	-
56cm	520	585	170	451	72°	70°	1075	100	-	-	-
60cm	-	-	-	-	-	-	-	-	-	-	-

ROVER													
SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M
42cm	37	52.7	10	71	6.8	28	40	5	58.9	42.5	100.4	51	7.55
45cm	37	53.2	10.5	71	6.8	28	40	5	58.9	42.5	100.5	51.5	7.5
48cm	37	53.4	10.7	71	6.8	28	40	5	59	42.5	100.6	52	7.45
50cm	37	55.3	12.5	71	6.8	28	40	5	59	42.5	100.6	52.8	7.4
52cm	38	57	14.3	71.5	6.8	28	40	5	60.3	42.5	101.9	54.8	7.35
54cm	38.5	58.5	15.9	71.5	6.8	28	40	5	61.3	42.5	102.9	56.3	7.3
56cm	39	59.3	16.7	71.5	6.8	28	40	5	62.3	42.5	103.9	57.8	7.25
58cm	39.5	60.9	18.4	71.5	6.8	28	40	5	63.3	42.5	104.9	58.8	7.25
60cm	39.8	62.9	20.5	71.5	6.8	28	40	5	64	42.5	105.8	59.6	7.25

ACE 5.0													
SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M
45CM	371	50.1	10	71	7.2	26.9	37	4.5	57	40.5	96.3	50.5	7.5
48CM	37.3	51.2	11	71.5	7.2	26.9	37	4.5	57.2	40.5	96.5	51.5	7.45
50cm	38.1	51.9	11.5	72	7.2	26.9	37	4.5	57.8	40.5	97.2	52.5	7.45
52cm	38.5	52.2	12	72.5	6.9	27.2	37	4.5	57.9	40.5	97.3	53.5	7.4
54CM	38.5	54.3	14	73	6.9	27.2	37	4.5	58	40.5	97.4	54.5	7.35


ALLEY CX											
SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
52cm	520	528	110	425	74°	71.5°	999	90	521	379	282
55cm	550	549	125	425	74°	72°	1015	100	537	395	282
58cm	580	563	140	425	74°	72°	1025	110	551	400	282

ALLEY WOOD											
SIZE	A	B	C	D	E	F	G	H	I	J	K
-	-	-	-	-	-	-	-	-	-	-	-
50cm	500	546	100	430	73°	72°	1009	80	-	-	-
55cm	550	561	130	430	73°	73°	1015	100	-	-	-
58cm	580	575	150	430	73°	74°	1020	120	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

ECORIDER INSPIRE LADY											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	480	585	120	451	73.5°	70°	1083	80	-	-	-
52cm	520	600	130	451	73°	70°	1093	100	-	-	-
56cm	560	615	140	451	73.0°	70°	1108	100	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

ECORIDER BASIC LADY											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	440	560	170	451	72°	70°	1050	80	-	-	-
50cm	480	570	170	451	72°	70°	1060	80	-	-	-
56cm	520	585	170	451	72°	70°	1075	100	-	-	-
60cm	-	-	-	-	-	-	-	-	-	-	-

AERO 6.0 / 5.0													
SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M
47cm	37.2	50	10	72	6.8	27.3	37	4.5	57	41	96.4	50.5	7.5
50cm	38.2	51.6	11.5	72.5	6.8	27.3	37	4.5	57.2	41	96.6	51.5	7.45
52cm	39.3	53.2	13	73	6.8	27.3	37	4.5	57.8	41	97.2	52.5	7.45
54cm	39.7	55.1	15	73	6.8	27.3	37	4.5	57.9	41	97.4	53.5	7.4

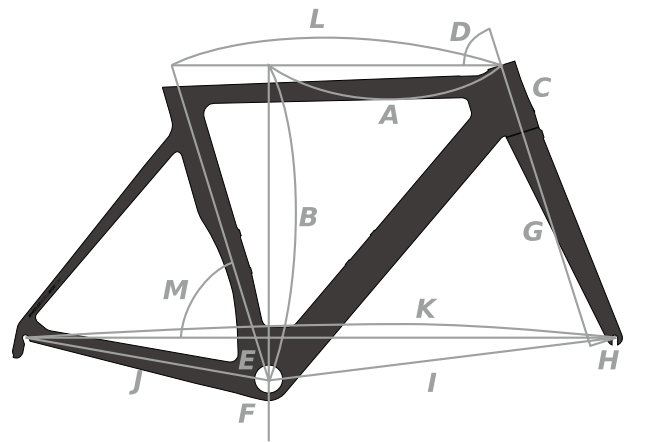

ALLEY RACE											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	490	515	130	435	74°	72°	997~	70	569	356	280
52cm	520	540	160	435	74°	72°	1018	80	597	373	280
55cm	550	570	190	435	74°	72.5°	1049	90	627	395	280
59cm	590	600	225	435	74°	73°	1077	100	660	416	280

ECORIDER PREMIUM LADY											
SIZE	A	B	C	D	E	F	G	H	I	J	K
44cm	440	560	170	451	72°	70°	1050	80	-	-	-
48cm	480	570	170	451	72°	70°	1060	80	-	-	-
52cm	520	585	170	451	72°	70°	1075	100	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

ECORIDER INSPIRE DI											
SIZE	A	B	C	D	E	F	G	H	I	J	K
44cm	440	560	170	451	72°	70°	1050	80	-	-	-
48cm	480	570	170	451	72°	70°	1060	80	-	-	-
52cm	520	585	170	451	72°	70°	1075	100	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

ECORIDER BASIC MAN											
SIZE	A	B	C	D	E	F	G	H	I	J	K
48cm	440	560	170	451	72°	70°	1050	80	-	-	-
50cm	480	570	170	451	72°	70°	1060	80	-	-	-
56cm	520	585	170	451	72°	70°	1075	100	-	-	-
60cm	-	-	-	-	-	-	-	-	-	-	-

CHILLI 5.0													
SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M
45CM	371	50.1	10	71	7.2	26.9	37	4.5	57	41	96.4	50.5	7.5
48CM	37.3	51.2	11	71.5	7.2	26.9	37	4.5	57.2	41	96.6	51.5	7.45
50cm	38.1	51.9	11.5	72	7.2	26.9	37	4.5	57.8	41	97.2	52.5	7.45
52cm	38.5	52.2	12	72.5	6.9	27.2	37	4.5	57.9	41	97.4	53.5	7.4
54CM	38.5	54.3	14	73	6.9	27.2	37	4.5	58	41	97.5	54.5	7.35

- A REACH
- B STACK
- C HEAD-TUBE LENGTH
- D HEAD-TUBE ANGLE
- E B-B HEIGH
- F B-B DROP
- G FORK LENGTH (FULL)
- H FORK RAKE/OFFSET
- I FRONT-CENTER
- J CHAIN-STAY LENGTH
- K WHEELBASE
- L TOP-TUBE LENGTH (HORIZONTAL)
- M SEAT-TUBE ANGLE

DISTRIBUTOR LIST



AUSTRALIA

CYCLING DEAL
TEL: + 61-3-97032288
FAX: + 61-3-97929136
SALES@CYCLINGDEAL.COM.AU
WWW.CYCLINGDEAL.COM.AU



CROATIA

MARKO-PROJEKT D.O.O.
TEL: + 385 1 4618 777
FAX: + 385 1 4658 777
INFO@MARKOPROJEKT.COM
WWW.MARKOPROJEKT.COM
 MARKO-PROJEKT BIKE SHOP



HONG KONG

SUN HOP CYCLE CO.
TEL: +852-23966581
FAX: +852-27898182
SUNHOP@BIZNETVIGATOR.COM
WWW.SUNHOP.COM



HUNGARY

J.P. MALI KFT.
TEL: + 36 1 420 5032
FAX: + 36 1 420 5321
MALI@MALI.HU
WWW.MALI.HU



ICELAND

VETRARHEIMAR EHF
EVEREST WHOLESALE COMPANY
TEL: +354-5334450
FAX: +354-5334452
HEIDAR@EVEREST.IS
WWW.EVEREST.IS



NORWAY

TEMPO AS
TEL: + 47 69 10 05 70
POST@TEMPOAS.NO
WWW.TEMPOAS.NO



POLAND

WHEELER POLSKA SP. Z O.O.
TEL: + 48 22 789 00 16
FAX: + 48 22 789 00 16
WHEELER@WHEELER.PL
WWW.WHEELER.PL



SLOVENIA

VELO D.D.
TEL: + 386 1 515 2094
FAX: + 386 1 519 5000
INFO@VELO.SI
WWW.VELO.SI



SWITZERLAND

INTERCYCLE
TEL: + 41 41 926 65 11
FAX: + 41 41 926 63 55
INFO@WHEELER.CH
WWW.WHEELER.CH



TAIWAN

KENFORCE INTERNATIONAL CO., LTD.
TEL: +886-4-8353575
FAX: +886-4-8353595
DALUX.KREX@GMAIL.COM
WWW.KREX.COM.TW



THAILAND

ASIA INT'L BUSINESS & SALES CO., LTD.
TEL: + 66 02 887 7813
FAX: + 66 02 448 3150
INFO@ASIABIKE.COM
WWW.ASIABIKE.COM



RUSSIA

TRASSA LTD
TEL: + 7 495964 4100
FAX: + 7 495 964 0866
TRASSA@TRASSA.RU



UKRAINE

ARKUS & ROMETE
TEL: + 38 0332 72 61 18
FAX: + 38 0332 72 61 18
WWW.WHEELER-UKRAINE.COM